


## YELLOW LIGHT EMITTING DIODE **08LCHY10**

### 1. Features

1-1. The radiation substrate material is

AlInGaP

1-2. Available for pulse operating

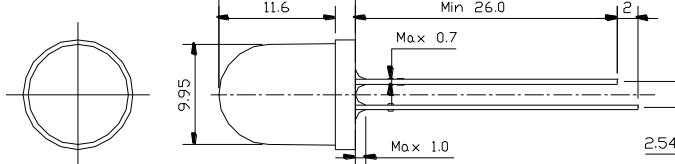

### 2. Applications

2-1. Electronic signs and signals

2-2. Small area illumination

\*NOTE 1. All dimensions in "mm"

2-3. Back-light

2-4. Indicator

### 3. Absolute Maximum Ratings ( Ta=25°C )

Item	Symbol	Rating	Unit
Reverse Voltage	V <sub>R</sub>	4	V
Forward Current	I <sub>F</sub>	50	mA
Pulse Forward Current <sup>*1</sup>	I <sub>FP</sub>	100	mA
Power Dissipation	P <sub>D</sub>	125	mW
LED Junction Temperature	T <sub>j</sub>	125	°C
Operating Temperature	T <sub>opr</sub>	-35~+85	°C
Storage Temperature	T <sub>stg</sub>	-40~+120	°C

\*<sup>1</sup> tw=100 μsec, T=10msec

### 4. Electro-Optical Characteristics ( Ta=25 °C )

Item	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA		1.97	2.3	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V			50	μA
Luminous Intensity	I <sub>V</sub>	I <sub>F</sub> =20mA		1600		mcd
Peak Wavelength	λ <sub>p</sub>	I <sub>F</sub> =20mA		591		nm
Capacitance	C <sub>t</sub>	f=1MHz		40		pF
Angle				30		deg.

### 5. Notes

LEDs are class 2 ESD sensitive.

Please observe appropriate precautions handling and processing.